


**HIGH CAPACITY FILTRATION WITH MINIMUM SPACE
REQUIRMENTS**

10 BPM/VESSEL

- SKID: 8'W x 10'L x 8'H
- WEIGHT: 11,500 Pounds
- 304 Stainless Steel
- 150 PSI ASME Code
- 4" PIPING: Parallel/ Series

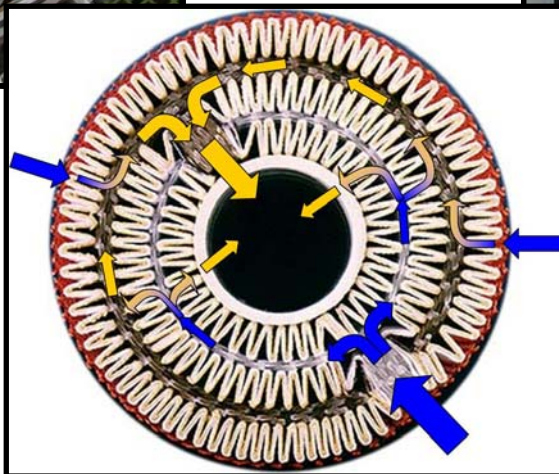


The Cost Effective Approach to Quality Filtration

FTC introduces its new 940 PLATINUM Series absolute rated filter cartridge as an alternative to DE filtration for completion, work over, and water injection applications.


This unique design, U.S. Patent No. 5824232, uses segregated flow channels and flow chambers to maximize the effective surface area of the pleated filter media within a 12.75 inch OD cartridge. Combining this design with the technique of pleating several different filter media together in a single pleat pack maximizes dirt holding capacity.

One 940 PLATINUM Series filter is designed to have the dirt holding capacity of 200 string wound or 50 standard 2.5 inch OD pleated cartridges of similar length.

With a recommended flow rate of two barrels per minute, this FTC PLATINUM Series filter is the solution to achieving optimum performance while minimizing filtration costs.

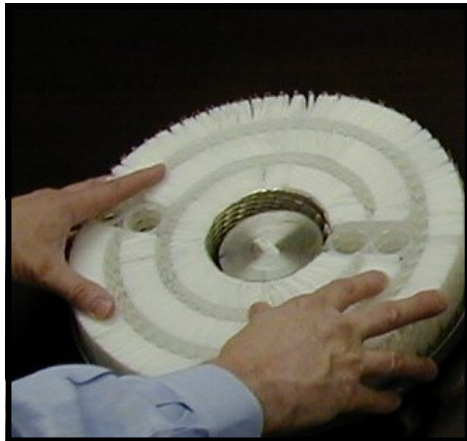

DATA FOR 940 SERIES FILTER

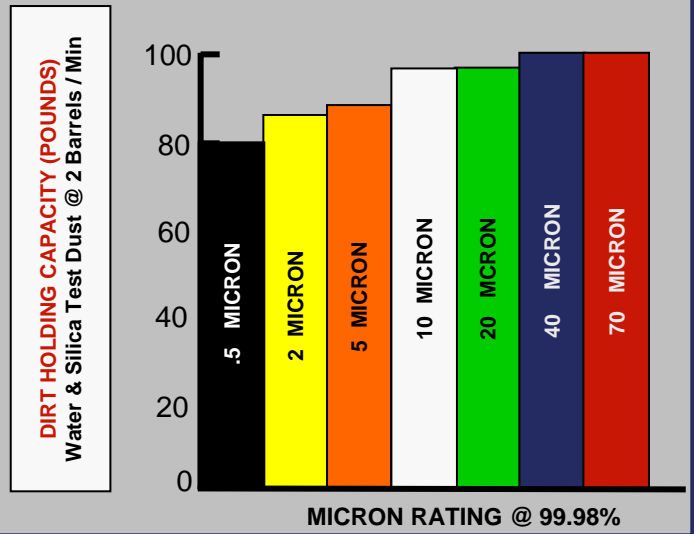

Notice: The information presented here is based on tests and data which FTC believes to be reliable, but their accuracy or completeness is not guaranteed. FTC MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FTC product is fit for a particular purpose or application is the responsibility of the user.



5175 Ashley Court
Houston, TX. 77041
Tel: (713) 849-0849
Fax: (713) 849-0202
www.ftc-houston.com