

## The Cost Effective Approach to Quality Filtration

FTC introduces its new DPU-600 HIGH-FLOW Series, absolute rated, alternative filter element. With a 99.98% removal efficiency, it is available in filtration ranges from 0.5 to 70 microns, and is designed for low solids applications requiring high flow rates.

The unique design of this pleated element provides a large effective filter surface area within the space constraints of a standard 6" cartridge diameter. Dirt holding capacity is maximized by combining several media layers together in a single pleat pack, while flow is maximized through the use of a large ID.



The FTC DPU-600 HIGH-FLOW Series element is designed to fit inside existing housings and provide an O-ring seal without housing modification. It is available in a variety of filter media to meet industry standards and chemical compatibility.

With recommended flow rates of up to 500 GPM, the DPU 600 HIGH-FLOW Series element can accommodate high flow rates, thus providing optimum performance at minimized filtration costs.



### HIGH-FLOW SERIES DATA

**DATA FOR 60" HIGH-FLOW SERIES**  
POLYPROPYLENE MEDIA

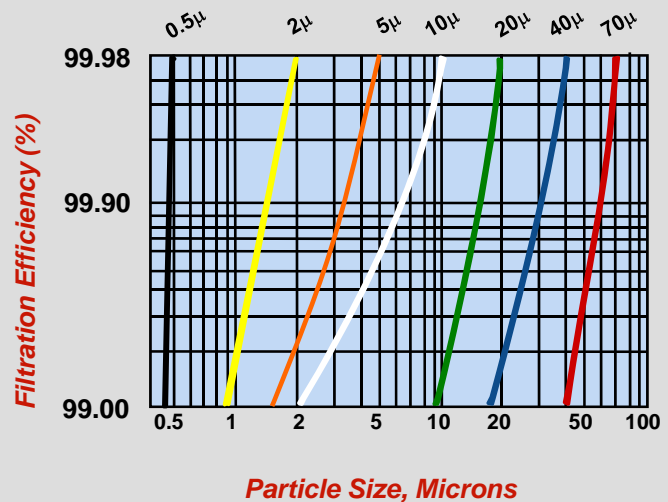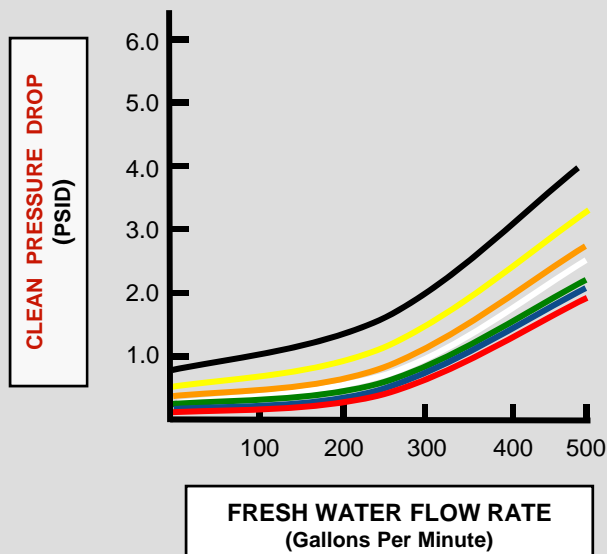

# HIGH-FLOW FILTER SERIES

## HIGH-FLOW SERIES CODES

**P** – 100% PolyPro Components  
Except O-Ring Seal, Thermally  
Bonded End Caps (Standard)

**N** – Nylon End Caps, Coreless Can  
Body, High Temperature Epoxy End  
Cap Sealing

**L** – Acetal End Caps, Polyester  
Core, Polyester Outer Wrapping  
Thermally Bonded End Caps

**M** – Carbon Steel End Caps,  
Coreless Can Body, High  
Temperature Epoxy End Cap  
Sealing

**S** – 304 SS End Caps, Coreless Can  
Body, High Temperature Epoxy End  
Cap Sealing



## CARTRIDGE CODING

Please contact the FTC Sales Department for  
Cartridge Coding Information:

(713) 849-0849  
sales@ftc-houston.com

Notice: The information presented here is based on tests and data which FTC believes to be reliable, but their accuracy or completeness is not guaranteed. FTC MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FTC product is fit for a particular purpose or application is the responsibility of the user.



FORM DPU-600 9/10

Filtration Technology Corporation

5175 Ashley Court  
Houston, Texas 77041  
(713) 849-0849 • 888-436-0849 • FAX (713) 849-0202  
[www.ftc-houston.com](http://www.ftc-houston.com)